

# CELSI

PROline

## DW131/132/133

Apparecchio ad incasso per interni orientabile, corpo in alluminio pressofuso, telaio in lamiera piegata, fissaggio a molle.

Indoor recessed adjustable spot light, die-casting aluminum body, folded plate chassis, spring fastening.



DW131



DW132



DW133



MODULE	Nr. LED	SUPPLY	LUMEN	POWER
<b>MDL302</b>	3	24Vdc	840	9W
<b>MDL307</b>	3	650mA	840	9W
<b>MDL303</b>	3	350mA	RGB	9W
<b>MDL200</b>	12	24Vdc	RGB	


COMPOSIZIONE CODICE / CODE SELECTION

MODEL	FINISHING	MODULE	LED COLOR	LENS
<b>DW131</b>	<b>G</b>	<b>302</b>	<b>C</b> 3200K	<b>15</b> (15°)
<b>DW132</b>	<b>W</b>	<b>307</b>	<b>N</b> 4100K	<b>45</b> (45°)
<b>DW133</b>		<b>303</b>	<b>F</b> 6000K	<b>60</b> (60°)
		<b>303</b>	<b>Y</b> RGB	<b>45</b> (45°)
		<b>200</b>	<b>X</b> RGB	<b>00</b> (120°)

• **Y** Equipaggiato con LED RGB di potenza totale 9W (350mA per canale) e disponibile con lente da 45°  
Equipped with Power LED RGB total 9W (350mA each channel) available through 45° lens

• **X** Equipaggiato con LED RGB 5050 totale 3W e disponibile con lente da 120°  
Equipped with LED RGB 5050 total 3W available through 120° lens

**G** Grigio / Grey    **W** Bianco / White

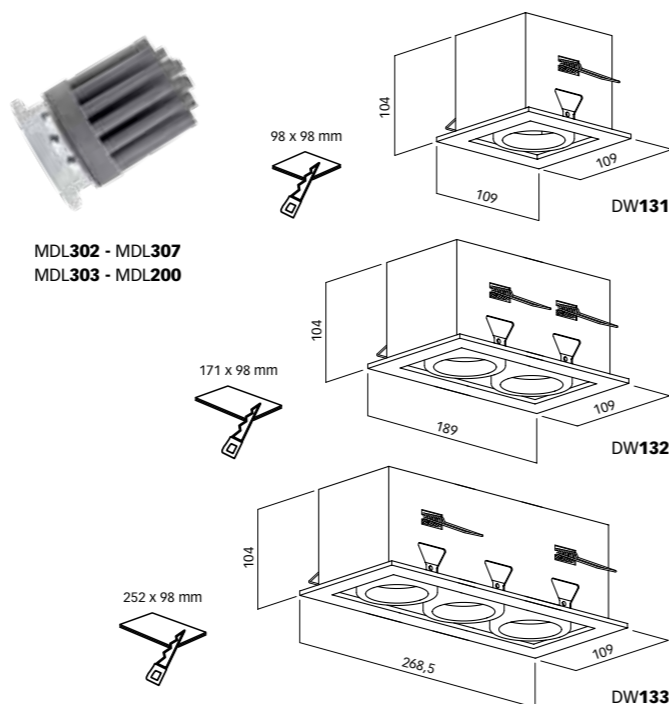


MDL302 - MDL307  
MDL303 - MDL200



**APC006.650**  
Per / For MDL307  
incluso / included



Gruppo ottico ad altissima efficienza luminosa.  
Optic group with high light efficiency.

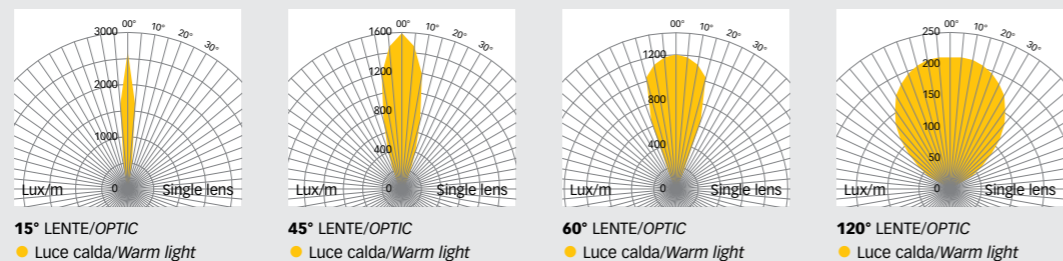

ACCESSORI / ACCESSORIES

SERIE **APT**  
CORRENTE COSTANTE  
CONSTANT CURRENT



	APT015.24	APT030.24	APT060.24
<b>MDL302</b>	1	Min 1 - Max 3	Min 1 - Max 7

Per MDL302 non incluso / For MDL302 not included



**CTR030**  
Per / For MDL303  
non incluso / not included



**CTR100S**  
Per / For MDL200  
non incluso / not included